


# Enigma touch latch

## Installation instructions



### Important

When using the touch latch do not install the rear plastic door stop in the track. A 25mm space between the rear of the door and the rear stud is required.

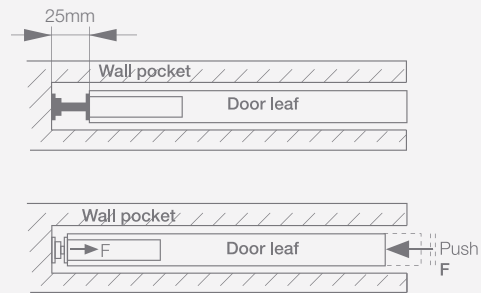

- 1 The touch latch is fitted to the rear of the door using a 25mm auger or spade bit



- 2 Insert the touch latch and fix into place using the screws provided



- 3 Fix the metal counter plate to the rear stud

**Important** Ensure the height corresponds exactly to the height of the touch latch in the door.