

seLO®

Experience simplicity.

**Via**  
Access Panels

Discreet design  
Effective operation



Sustainably  
sourced



Fire-rated  
FD120



Acoustic  
reduction



Air tight  
Class 4

Detailed product guide

# An introduction to Via


Via Access Panels provide discreet yet functional concealment for valves, plumbing, stop-taps, switches and more.

## Overview

---


Naturally creating services cupboards within cavities and recesses, the access panels offer a lockable door that is powder-coated and can be painted to match with the surrounding decor.

Constructed in robust 1.2mm thick Zintec steel, the Via access panels are fitted with either pin hinges or a continuous piano hinge. The T-key lock is concealed by a white plastic collar and plug, with the option of touch latch to completely conceal all locks.

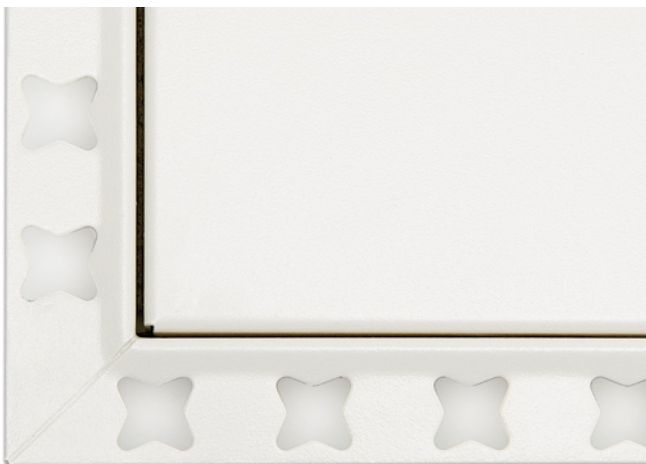

### Beaded frame

To be plastered or taped and jointed with surrounding finish.

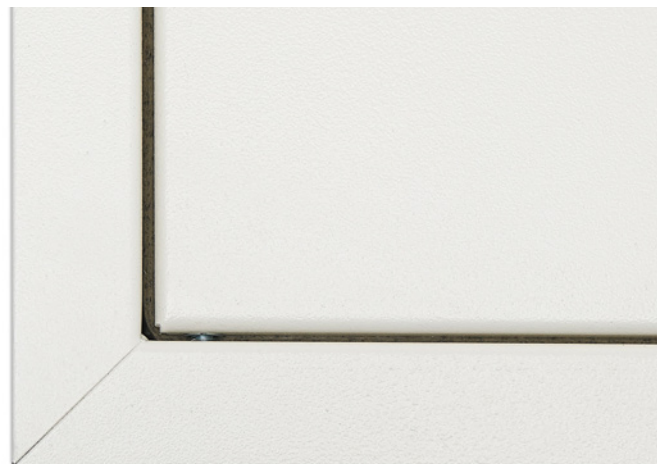

### Picture frame

Solid flange sits on surface of the adjoining wall or ceiling.

## Via benefits



### Robust

Robust construction for demanding use.



### Simple

Streamlined design - no wall reinforcement.



### Pre-primed

Powder-coated door enables over-painting.



### Fire rated

Available fire-rated to BN and EN standards.

## Preparation and fitting

Via Access panels are easy to fit. A clear opening must be cut in the structure, 10mm larger than the panel ordered. The panel is then offered up and fixed back using 38mm screws through the pre-punched holes to all four sides of the frame.

Wherever possible, fitting should take place with the door in place.

## Sizes

Via is manufactured to your specifications at the size required. Common sizes are:

300 x 300mm	450 x 450mm
600 x 600mm	900 x 900mm
900 x 600mm	1200 x 600mm

Maximum fire rated size is: 900 x 2300mm

## Via Basic

- › Metal faced
- › NFR
- › Wall / Ceiling

## Via Plasterboard faced

- › NFR
- › FD60
- › FD120
- › Wall / Ceiling

## Via Premier

- › Metal Faced
- › NFR
- › FD60
- › FD120
- › Acoustic
- › Air tight
- › Wall / Ceiling
- › Tiled walls
- › Circular (NFR only)


## Via Premier System overview

1 Lock

2 Intumescent seal

3 Plastic lock cover

4 25mm Picture/Beaded frame

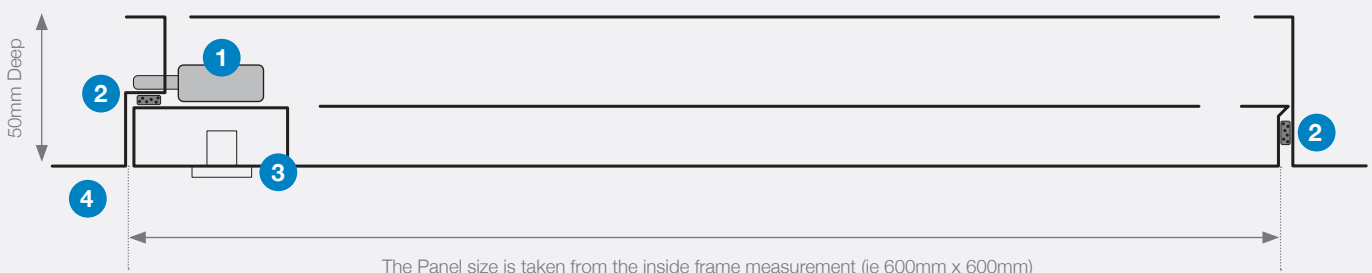

# Let's talk about your project

Contact us today to speak to one of our experienced project leaders.

**call** 020 3880 0339 / **email** sales@selo-uk.com

Visit our website to view our complete range of Concealed Doorsets, Access Panels and AOVs.

[www.selo-uk.com](http://www.selo-uk.com)



**selo**®

call 020 3880 0339  
email sales@selo-uk.com  
www.selo-uk.com

Selo  
K2 Kents Hill Business Park Timbold Drive  
Milton Keynes MK7 6TT

Connect  
@selosimplicity

